


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.000	127
No. OF BOLTS		8	8
THREAD / THRO' HOLE		0.413	10.5
CROWN WHEEL SPIGOT DIA	D2	4.252	108.0
BEARING DIA	D3	1.627	41.3
BEARING DISTANCE	L1	4.129	104.9
SPIGOT LENGTH	L2	0.768	19.5
	L2/A	0.768	19.5
OVERALL LENGTH	L3	5.665	143.9
BEARING/CROWN WHEEL	L4	0.76	19.3
BORE	D4	1.1824	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 DP	
TYPE		FLAT ROOT	SIDE FIT
PRESSURE ANGLE		30 DEG	

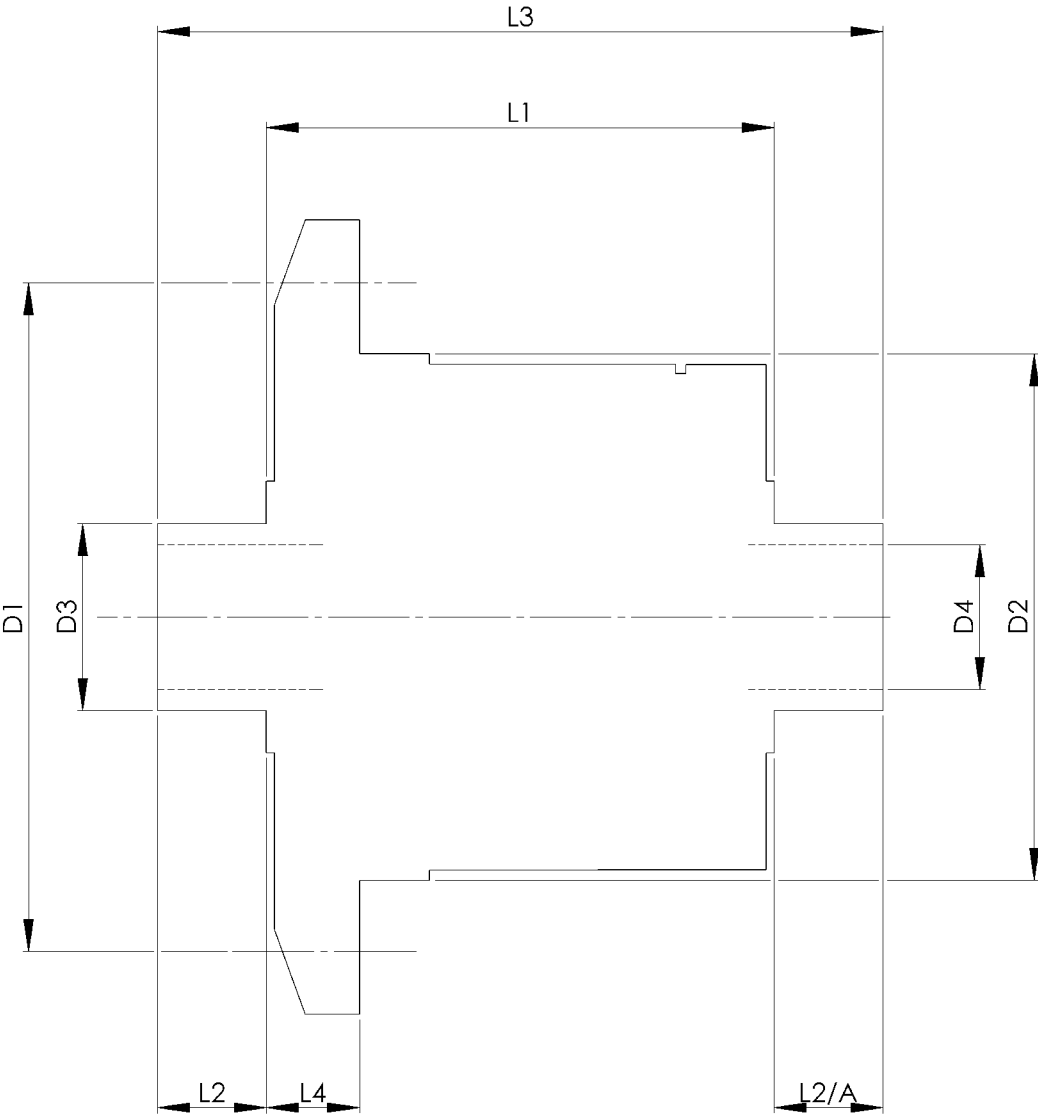

TITLE R.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF6N

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
IS THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	
Used In.	BMW Z3 4 cyl, 318ti (E36 compact)